



www.insize.com




0319-TH60
MINI TEMPERATURE AND HUMIDITY METER
OPERATION MANUAL

PLEASE SCAN QR
CODE TO WATCH
THE OPERATION
VIDEO OF PRODUCTS.




Please read this User Manual carefully before using the product, and keep it properly.

Product descriptions

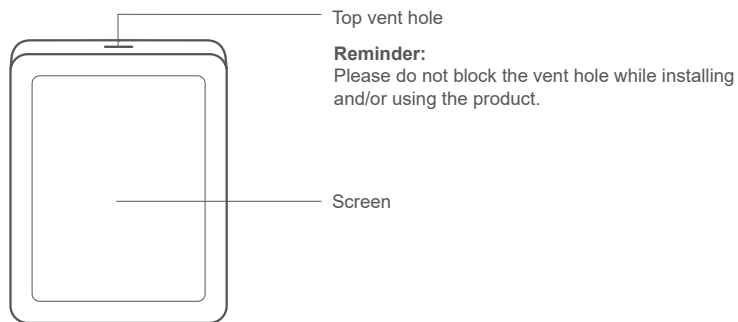


Front

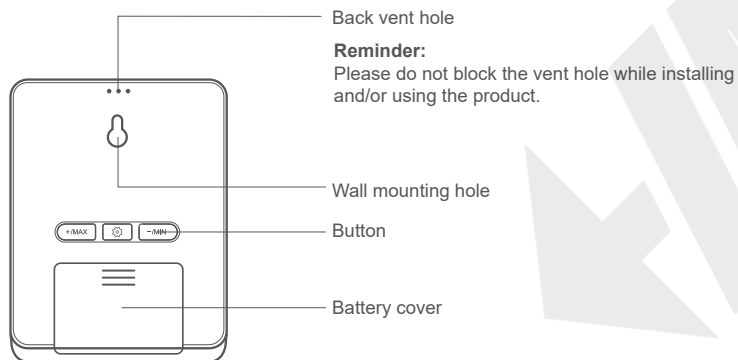

Back


Accessories

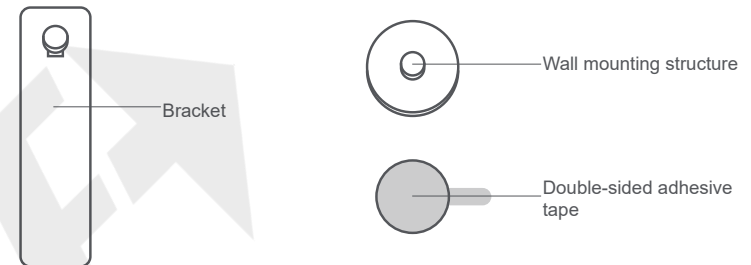


Install

The product could be installed with various ways:


Using the product together with bracket: Align the bracket with the wall mounting hole on the back of the product and press the bracket into the mounting hole. Push it upward. After the bracket is securely connected, put the product onto a table, bookshelf or other appropriate flat surface.



Mounting the product onto walls: Paste the double-sided adhesive tape onto the surface of wall mounting structure, remove the release paper and attach the other side to the wall surface.



LCD Indicators

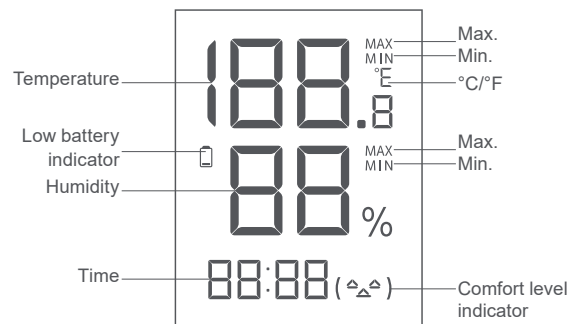

Comfort level indicator descriptions


Temperature Humidity	Temperature <19°C	19°C≤Temperature ≤27°C	Temperature >27°C
Humidity<20%	(^ -)	(^ -)	(^ -)
20%≤Humidity≤85%	(^ -)	(^ _ ^)	(^ -)
Humidity>85%	(^ -)	(^ -)	(^ -)

Low battery reminder

When this icon appears on the screen, it indicates that the battery is low and must be replaced.



Buttons and functions

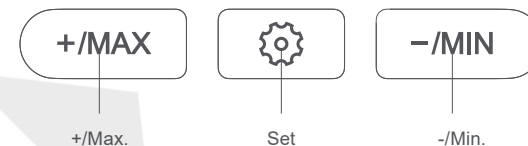

View Max./Min.

Press “+” or “-” button while in normal display mode. The LCD will then show the corresponding maximum or minimum temperature and humidity over the past 24 hours.

Reminder: If no operation is performed within five seconds, the product will automatically quit View mode and enter normal display mode.

Set time and temperature units

Press and hold the Set button “”, The number indicating the hour will start flashing and the product will enter settings mode.

While in settings mode, corresponding numbers will flash. Press “+” or “-” button to change the settings.


After setting are completed, press the Set button “” to turn to the next setting.

Reminder: If no operation is performed within 10 seconds after the numbers start flashing, the product will automatically quit setting mode and enter normal display mode.

Maintenance

Battery replacement

Open the battery cover along the direction marked in the figure. While keeping the positive electrodes of the two CR2032 button batteries facing upward, install them into the battery compartment by aligning them with the buckle and then closing the battery cover.

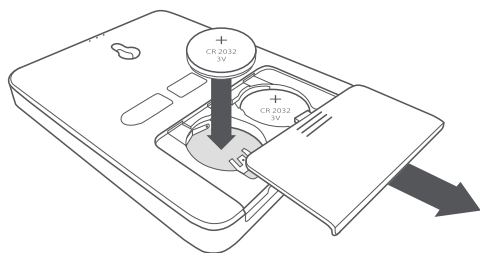

Reminder :All illustrations in the operation manual to present the product, accessories, user interfaces, etc. are schematic for reference only. Since our products are constantly updated upgraded, actual products may slightly differ from the schematic illustrations. Actual products shall govern accordingly.

Cleaning

- Please avoid any water from seeping into the product while cleaning it.
- Use a piece of soft cloth soaked with neutral detergent to wipe away dirt on the product surface.

Notices

- 1.Do not immerse the vent holes of the product in water.
- 2.Do not forcibly remove the product after it has been attached to wall to avoid damaging product or wall surface.
- 3.This product is not to be used in environments below 0 C . Please keep away from environments with high temperatures, high humidity, and other severe conditions.

Specification

Temperature range	0°C~55°C/32°F~131°F
Temperature resolution	0.1°C/0.1°F
Temperature accuracy	±0.5°C/±0.9°F
Humidity range	0%RH~99%RH (non-condensing)
Humidity resolution	1%RH
Humidity accuracy	±5%RH (at 10%RH~90%RH), other range ±7%RH
Power supply	2×3V CR2032 batteries
Dimension	88×70×12mm
Weight	62g