


Attention:This caliper is not waterproof. If there is coolant liquid on the sticker, the reading may be incorrect. Please clean the sticker with dry cloths. If the problem is not solved, please use WD40 to clean the sticker.

Resolution: 0.01mm/0.0005"


Accuracy: ±0.03mm

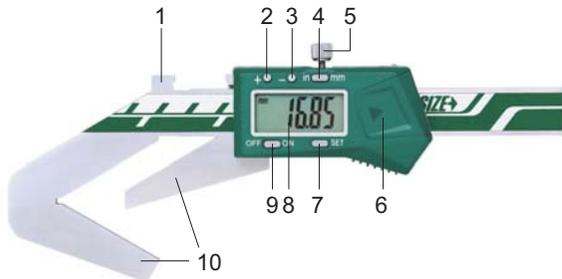


- 1-Rule
- 2-'mm/inch' button
- 3-LCD display
- 4-Data output cover
- 5-Measuring jaw
- 6-'I/O' button
- 7-'ZERO' button
- 8-Battery cover

1. The caliper is used to measure the outside diameter of odd number of flutes(such as taps, reamers, end mills and gears).


2. Install battery:



Step 1:
Remove the battery cover



Step 2:
Put CR2032 into battery house, the positive side of battery (+) should face out



Step 3:
Close the battery cover

3. Buttons:

'in/mm' --- inch and mm conversion

'OFF/ON' --- turn off/on

'SET', '+', '-'

--- long press 'SET' >3s to preset initial reading, 'set' flickers on the screen, press '+' or '-' button to change the value, short press 'SET' to exit.

--- short press 'SET' to show the preset value

4. Before the measurement, the preset value needs to be set:

--- Press 'SET', '+' and '-' buttons to set 6mm (0.2360") on caliper

--- When the two measuring claws are in full contact, short press the 'SET' button to make the display screen display the preset value set above

5. Measurement:

--- Put the measured workpiece into the caliper measuring jaw so that the two measuring jaws are full contact with the measured workpiece.

--- At this time, the reading divided by 1.5 is the actual value of the measured workpiece

6. To get accurate measurement, it is necessary to control the force. During measurement, please always apply constant and proper force on the caliper.

7. Automatic power off in about five minutes. Press 'OFF/ON' button or move the digital unit to turn on display.

8. One battery can last for one year use. When the battery is running out, display will become weak, abnormal reading or other phenomena will appear when moving the digital unit, please replace battery. If caliper is not be used for more than 3 months, please remove the battery. Otherwise, liquid may leak from the battery and damage the caliper.

9. If digits do not change when buttons are pressed, take out battery and put it back after 1 minute.

10. Working temperature is 0~40°C/32~104°F, relative humidity should not exceed 80%.