




OPERATION INSTRUCTION

Back Plunger Type Dial Indicator Set

Part No.	Range *	Graduation	Accuracy	Range/rev	Dial reading
2224-02	.2"	.001"	±.001"	.1"	0-100


* When using double-end lever styli, the range is .1"

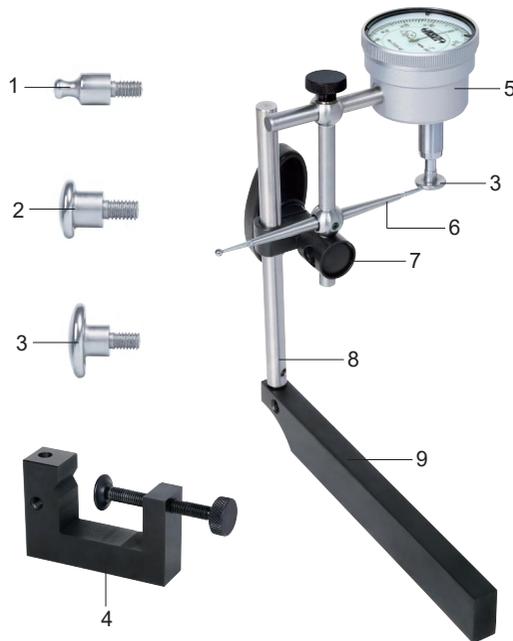

- 1-Point (radius .118" SR ball)
- 2-Point (radius .315" SR ball)
- 3-Point (radius .512" SR ball)
- 4-G clamp (with 3 M6 threaded mounting holes)
- 5-Back plunger type dial indicator
- 6-Double-end lever styli
- 7-Lock (post hole with a 8mm diameter and 1/4in holding capacity)
- 8-Spindle
- 9-Clamping base (with 2 M6 threaded mounting holes)
- 10-L wrench



1. According to the workpiece to be measured, select the appropriate component assembly for measurement.

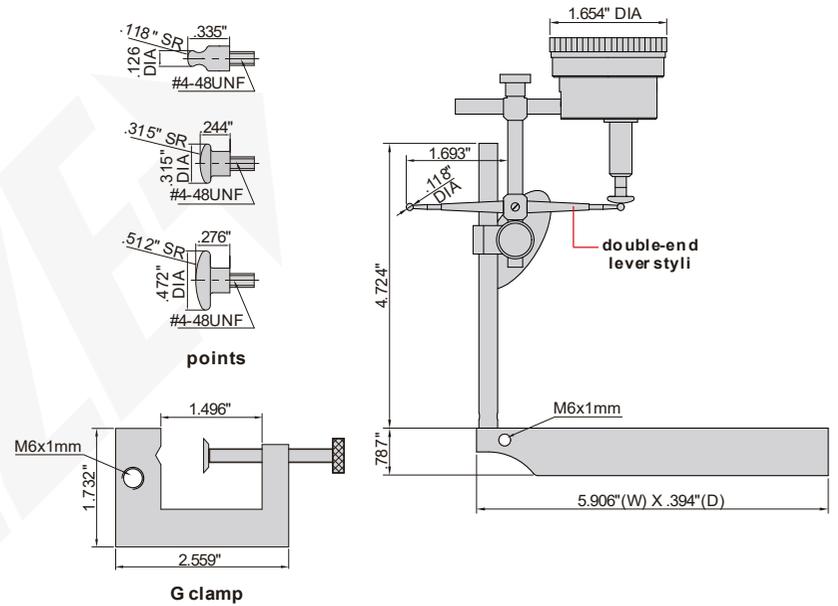

2. Component 6: allows indicator be used over obstructions and inside holes to a depth of approximately 1-5/8".

application



3. After use, please oil it in time for protection.

MN-2224E-E

V0