




OPERATION INSTRUCTION


Magnetic Sine Table

Code	Table size (LxW)	Roller distance (E)	Adjustable angle	Accuracy of angle
6538-100	150x150mm	100mm	0-60°	±15"

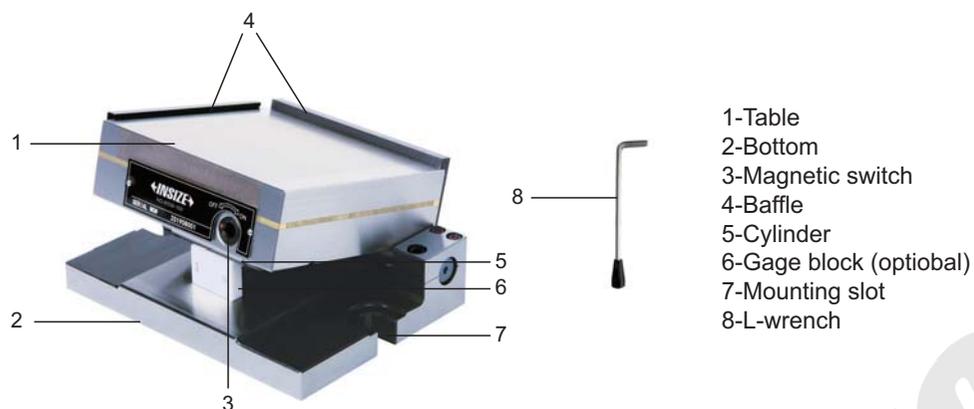

- Mainly used for processing and positioning of workpieces on various surface grinding machines and tool grinding machines, with the function of high-precision angle processing and positioning.
- Installation:
 - Clean the bottom of the magnetic sine table and the machine table, place the magnetic sine table in the appropriate position on the machine table, and fix it.
 - Use a dial gage to measure the parallelism of the magnetic sine table to the machine table, correct the magnetic sine table according to requirements.
- Operation:
 - Calculate the height of gage block according to the formula $H = \sin \alpha E$ (α is the angle to be processed, H is the height of the gage block, E is the center distance between two cylinders), or you can refer to attached table 1. Then put the gage block of calculated height properly under the cylinder.

- Place the workpiece in the proper position on the magnetic sine table, then use hex wrench to turn the magnetic switch from OFF clockwise to ON.
- After processing, use hex wrench to turn the magnetic switch from ON counterclockwise to OFF to disconnect the magnetic circuit and remove the workpiece.

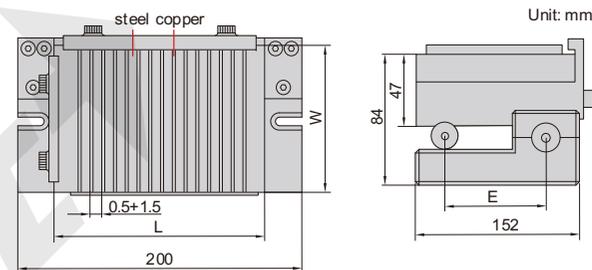

- Notice:
 - The magnetic sine table is not hardened and has no hardness. Pay attention to protection when using.
 - Keep magnetic sine table clean, disconnect the magnetic circuit after use, and apply antirust oil.
 - It is forbidden to stack sundries on the table to avoid affecting flatness.
 - During long-term use, if the roughness, flatness of the table or the parallelism is out of tolerance after workpiece is placed, the processing conditions of the machine tool can be used to repair.
 - Repair in time, if the operating force of the handle is too large or the holding force is obviously insufficient when using hex wrench to turn the switch.

MN-6538-E

V0

Table 1: Sine conversion table

Angle	0'	10'	20'	30'	40'	50'
0°	0.000	0.291	0.582	0.873	1.164	1.454
1°	1.745	2.036	2.327	2.618	2.908	3.199
2°	3.490	3.781	4.071	4.362	4.653	4.943
3°	5.234	5.524	5.814	6.105	6.395	6.685
4°	6.976	7.266	7.556	7.846	8.136	8.426
5°	8.716	9.005	9.295	9.585	9.874	10.164
6°	10.453	10.742	11.031	11.320	11.609	11.898
7°	12.187	12.476	12.764	13.053	13.341	13.629
8°	13.917	14.205	14.493	14.781	15.069	15.356
9°	15.643	15.931	16.218	16.505	16.792	17.097
10°	17.365	17.651	17.937	18.224	18.509	18.795
11°	19.081	19.366	19.652	19.937	20.222	20.507
12°	20.791	20.076	21.360	21.644	21.928	22.212
13°	22.495	22.778	23.062	23.345	23.627	23.910
14°	24.192	24.474	24.756	25.038	25.320	25.601
15°	25.882	26.163	26.443	26.724	27.004	27.284
16°	27.564	27.843	28.123	28.402	28.680	28.959
17°	29.237	29.515	29.793	30.071	30.348	30.625
18°	30.902	31.178	31.454	31.730	32.006	32.282
19°	32.557	32.832	33.106	33.381	33.655	33.929
20°	34.202	34.475	34.748	35.021	35.293	35.565
21°	35.837	36.108	36.379	36.650	36.921	37.191
22°	37.461	37.730	37.999	38.268	38.537	38.805
23°	39.073	39.341	39.608	39.875	40.142	40.408
24°	40.674	40.939	41.204	41.469	41.734	41.998
25°	42.262	42.525	42.788	43.051	43.313	43.575
26°	43.837	44.098	44.359	44.620	44.880	45.140
27°	45.399	45.658	45.917	46.175	46.433	46.690
28°	46.947	47.204	47.460	47.716	47.971	48.226
29°	48.481	48.735	48.989	49.242	49.495	49.748
30°	50.000	50.252	50.503	50.754	51.004	51.254
31°	51.504	51.753	52.003	52.250	52.498	52.745
32°	52.992	53.238	53.484	53.730	53.975	54.220
33°	54.464	54.708	54.951	55.194	55.436	55.678
34°	55.919	56.160	56.401	56.641	56.880	57.119
35°	57.358	57.596	57.833	58.070	58.307	58.543

Angle	0'	10'	20'	30'	40'	50'
36°	58.779	59.014	59.248	59.482	59.716	59.949
37°	60.182	60.414	60.645	60.876	61.107	61.337
38°	61.566	61.795	62.024	62.251	62.479	62.706
39°	62.932	63.158	63.383	63.608	63.832	64.056
40°	64.279	64.501	64.723	64.945	65.166	65.386
41°	65.606	65.825	66.044	66.262	66.480	66.697
42°	66.913	67.129	67.344	67.559	67.773	67.987
43°	68.200	68.412	68.624	68.835	69.046	69.256
44°	69.466	69.675	69.883	70.001	70.298	70.505
45°	70.711	70.916	71.121	71.325	71.529	71.732