



MPI-HD130

UV FLAW DETECTION LIGHT

OPERATION MANUAL

PLEASE SCAN QR CODE TO
WATCH THE OPERATION
VIDEO OF PRODUCTS.




UV FLAW DETECTION LIGHT


PRODUCT FEATURES

- UV-B content is 0
- Without No need to wait, instantly reaches 100% power
- Supplied with glass filter
- External surface temperature increase <5K (5°C) for continuous working

UV IRRADIANCE INTENSITY DISTRIBUTION MAP(381mm)

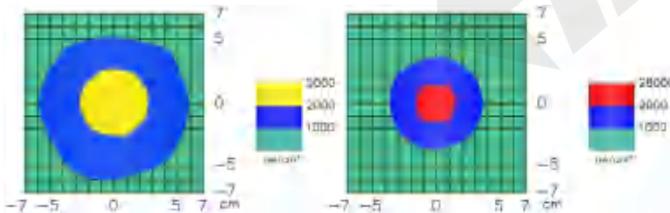

EXTERNAL DIMENSIONS

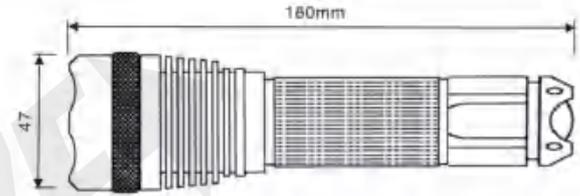

SPECIFICATION

UV (Light) Lux	6000~11000μW/cm ²
UV light power	UV LED-3W
FLUX error	±10% (at 0°C~40°C)
Lighting characteristics	center lighting
Wavelength	room temperature 25°C, 365nm±3nm (UVA)
Power supply	3.7V rechargeable lithium battery
Battery capacity	2600mAh
Charging time	2h~3h
Battery life	UV LED 3h~4h
Dimension	180×47mm
Weight	260g (including battery)