



[www.insize.com](http://www.insize.com)



## MPI-HF360

### RECHARGEABLE UV FLAW DETECTION LIGHT

PLEASE SCAN QR CODE TO  
WATCH THE OPERATION  
VIDEO OF PRODUCTS.



VIDEO




# RECHARGEABLE UV FLAW DETECTION LIGHT


## PRODUCT FEATURES

- UV-B content is 0
- Without preheating, instant start, instant on/off, no need to wait
- Supplied with glass filter
- External surface temperature increase <8K (8°C) for continuous working

## UV IRRADIANCE INTENSITY DISTRIBUTION MAP(381mm)

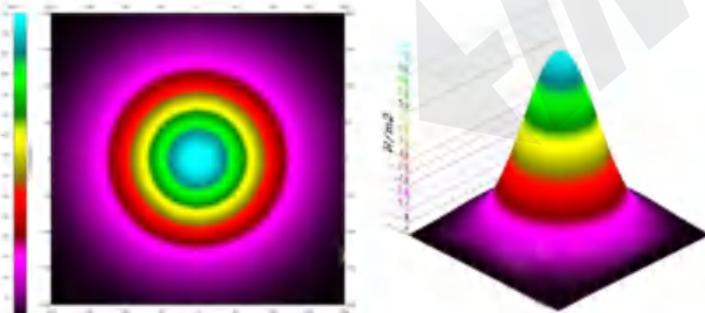

## EXTERNAL DIMENSIONS

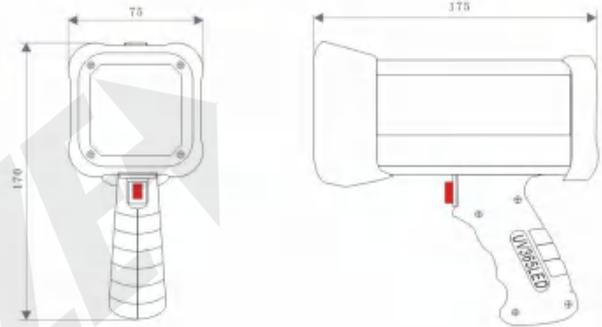

## SPECIFICATION

UV (Light) Lux	about 6000 $\mu$ W/cm <sup>2</sup>
UV light power	UV LED-12VA
Covering area	diameter approximately 300mm (calibrated at 381mm distance)
FLUX error	$\pm$ 10% (at0°C~40°C)
White light content	$\leq$ 20LUX
Lighting characteristics	center lighting
Wavelength	365nm $\pm$ 3nm (UVA), at temperature 25°C
Power supply	10.8V rechargeable lithium battery
Battery capacity	3200mAh
Charging time	3h~4h
Battery life	UV LED 5h~6h
Dimension	175x75x170mm
Weight	750g (including battery)