


Attention:This caliper is not waterproof. If there is coolant liquid on the sticker, the reading may be incorrect. Please clean the sticker with dry cloths. If the problem is not solved, please use WD40 to clean the sticker.

Resolution: 0.01mm/0.0005"

Accuracy: $\pm 0.03\text{mm}$ (Range 0-300mm/0-12")

$\pm 0.05\text{mm}$ (Range 300-500mm/12-20")

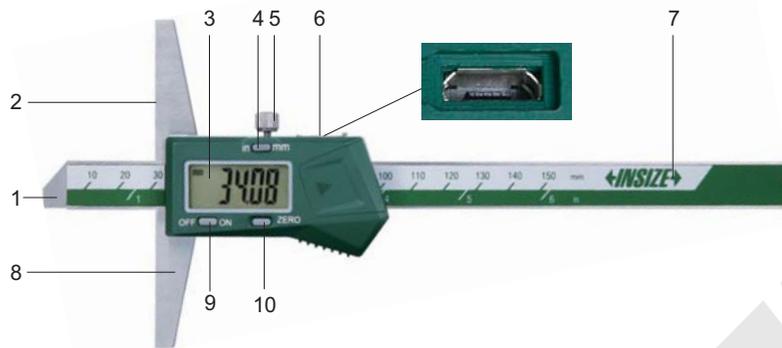

- 1-Measuring face
- 2-Base plane
- 3-LCD display
- 4-'in/mm' button
- 5-Locking screw

- 6-USB output
- 7-Beam
- 8-Base
- 9-'OFF/ON' button
- 10-'ZERO' button

1. Install battery:

- Remove the battery cover (fig.1)
- Put CR2032 battery into battery house, the positive side of battery (+) should face out (fig.2)
- Close the battery cover (fig.3)




fig.1




fig.2




fig.3

2. Buttons:

- 'in/mm' is for inch and mm conversion
- 'OFF/ON' is to turn on/off
- 'ZERO' is to set zero

3. It is necessary to set zero on the inspection plate before measuring. Clean the measuring faces and inspection plate surface with soft cloth, then put the base plane on the inspection plate, keep pressing the base. Gently pull the beam to let measuring face contact with the plate, lock the locking screw and press "ZERO" button to set zero. Caliper should be checked regularly to make sure that it is properly zero set.

4. Please pay attention to follow two points during measurement:

- Make sure there are no dust, cutting chips or other debris on the measuring faces and workpiece surface, otherwise, the measurement may be incorrect.
- Measuring face and base plane should be protected from being scratched or damaged. It is necessary to press the base steady and apply constant and proper force to pull the beam.

5. Automatic power off in about twenty minutes. Press 'OFF/ON' button or move the digital unit to turn on display.

6. Optional accessory: data output cable (code 7315-, 7302-, 7305-).

7. One battery can last for one year use. When the battery is running out, the display will become weak, abnormal reading or other phenomena will appear when moving the digital unit, please replace battery. If caliper is not be used for more than 3 months, please remove the battery. Otherwise, liquid may leak from the battery and damage the caliper.

8. If digits do not change when buttons are pressed, take out battery and put it back after 1 minute.

9. Working temperature is 0-40°C/32-104°F, relative humidity should not exceed 80%.